


PRODUCT DESCRIPTION

Bulldog Homegrown Stripping Tape Olive uses a thermally stabilised polypropylene backing with a urethane based pressure sensitive adhesive. The product performs in temperatures up to 138°C for at least 45 minutes - leaving a sharp, clean separation line. The product is pre-cut into 8 sections across the roll making it ideal for striping coach lines in a multitude of configurations.

PRODUCT CONSTRUCTION

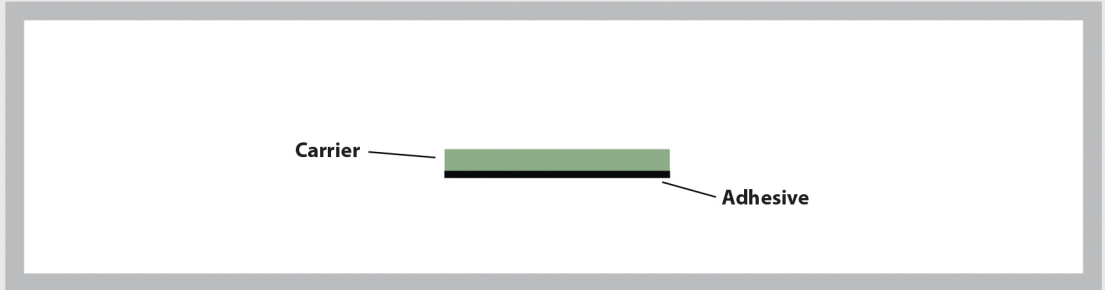

SHELF LIFE

One year from date of receipt by customer when stored at 22°C (72°F) and 50% relative humidity.

PHYSICAL PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Carrier	Embossed Polypropylene
Colour	Olive Green
Adhesive	Pigmented Urethane Pressure Sensitive Adhesive
Thickness	0.127mm PSTC-33
Width	25mm (+/- 1mm)
Length	14m (+/- 0.1m)

PERFORMANCE PROPERTIES

Values shown are typical values and not to be used for specification purposes.

Tensile Strength	0.215 kg/mm ASTM D-3759
Elongation at Break	600%
Adhesion to Steel	33.6 g/mm ASTM D-3330
Heat Resistance	138°C Maximum for 45 minutes

BULLDOG ABRASIVES SOUTHERN AFRICA (PTY) LTD

No. 4 Andries Street South, Wynberg, Johannesburg, 2090
 Tel: +27 (0) 11 786 5991
 Email: sales@bulldogabrasives.co.za
 Website: www.bulldogabrasives.co.za