




SU42Y

- + Improved flatness
- + Improved running behaviour
- + Improved grain adhesion

Product data sheet

Backing	Polyester cloth
Bonding	Synthetic resin
Grain	Silicon carbide
Coating	Closed
Application area	Fibreboards (wood, cement, gypsum), glass, stone, plastic, metal
Application	Wide belt, long belt and segment belt grinding machines

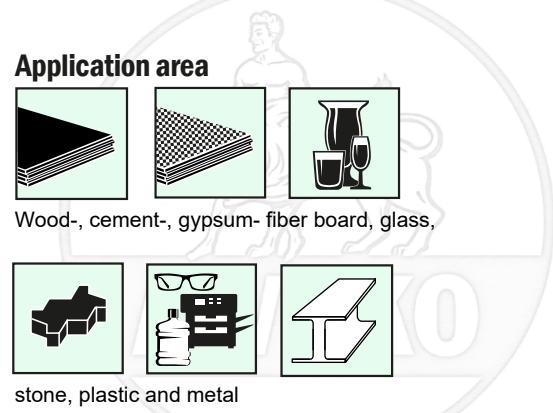

Advantages

Very heavy cloth with high abrasive power, optimal electrical conductivity, no dust accumulation, also suitable for wet grinding.

Available grits

12 16 24 30 36 40 50 60 80 100 120 150 180 220 240 280 320 360 400 500 600 800 900 1000 1200 1500


Application



Stationary and portable machine sanding




Product range



Rolls, wide-, long-, narrow- and segment-belts

Coating



Closed

Always pay attention to your safety while working

