

ACCESSORIES for Sanding, Grinding, Polishing





Rotary Sander/Polisher Pads

- 1.1 Rotary Pad High Profile(Soft)
- 1.2 Rotary Pad Middle Profile



Backing Pads For Resin Fibre Discs

- 2.1 Backing Pads For Resin Fibre Discs (Plastic Injected)
- 2.2 Backing Pads For Resin Fibre Discs (Rubber Molded)



DA Sander Backing Pads, Interface Pads

- 3.1 DA Pads Introductions
- 3.2 DA Pads 1-3.5 inch
- 3.3 Classic DA Pads
- 3.4 PRO-Quality DA Backing Pads
- 3.5 Dust Free Sanding Pads
- 3.6 Dust Devil™ V3 DA Pads
- 3.7 Dust Devil™ V2 DA Pads
- 3.8 Cushion Pads, Interface Pads



Roloc Disc Holders and Pads

- 4.1 Roloc Disc Holder and Pads



Rubber Eraser Pads

- 4.2 Rubber Eraser Pads



Drill Pads and Adaptors

- 5.1 Drill Pads and Adaptors



Hand Pads

- 6.1-6.2 Hand Pads
- 6.3 Dust-Free Hand Sanding Blocks



Stone Working Pads, Felt Mops

- 7.1 Stone Working Pad and Felt Mops



Foam pads

- 8.1 Foam Pads Introductions
- 8.2 Foam Pads Classic Range
- 8.3 Diamond-Cross Foam pads
- 8.4 Specially Featured Foam Pads
- 8.5 Double-Side Foam Pads
- 8.6 Spot Polishing Pads and Foam Applicators
- 8.7 Foam Polishing Balls and Cones



Wool Pads

- 9.1 Wool Material Introduction
- 9.2-9.3 Wool Pads



Backing Pads for Foam Pad & Wool Buffing Pads

- 10.1 FlexEdge Rotary Backing Plate



Sanding Machine Pads

- 11.1 Specially Featured Backing Plates for Sanding Machine



1.1 Rotary Pad High Profile



PUR molded, soft density.
 Work with lambswool pads, foam pads and abrasive discs.
 Ideal for contour polishing e.g. auto-body, fiber-glass boat, surfboard.



Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
14222-12	2" (50mm)	5/8"-11	✓	12000	Soft	22mm
14222-22	2" (50mm)	M14-2	✓	12000	Soft	22mm
14232-12	3" (70mm)	5/8"-11	✓	12000	Soft	22mm
14232-22	3" (70mm)	M14-2	✓	12000	Soft	22mm



Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
14350-12	5" (123mm)	5/8"-11	✓	8000	Soft	27.5mm
14350-22	5" (123mm)	M14-2	✓	8000	Soft	27.5mm
14350-32	5" (123mm)	M16-2	✓	8000	Soft	27.5mm
16360-12	6" (148mm)	5/8"-11	✓	5000	Soft	29mm
16360-22	6" (148mm)	M14-2	✓	5000	Soft	29mm
16360-32	6" (148mm)	M16-2	✓	5000	Soft	29mm



Item No.	Size (D)	Thread	Face	Max.RPM	Density	Thickness
16365-TF	7" (166mm)	T	F	5000	Soft	32mm
16380-TF	8" (200mm)	T	F	4500	Soft / Medium	34mm

T (Thread) 1=5/8"-11
 2=M14-2
 3=M16-2

F (Face) 1=PSA
 2=Velcro
 3=Canvas

1.2 Rotary Pad Middle Profile

Middle Profile Backing pads for general polishing job.

PUR molded, high flexibility and durability.

Available densities: Soft (White PUR), Medium (Yellow PUR)



Item No.	Size	Thread	Velcro	Density
14212-24	1.2"(30mm)	M14	✓	Soft
14220-24	2"(48mm)	M14	✓	Soft
14231-24	3"(74mm)	M14	✓	Soft
14212-14	1.2"(30mm)	5/8"-11	✓	Soft
14220-14	2"(48mm)	5/8"-11	✓	Soft
14231-14	3"(74mm)	5/8"-11	✓	Soft

Remark: PSA face and M10-1.5 thread are available upon demand



Item No.	Size	Thread	Velcro	Max.RPM	Density
14240-22	4" (98mm)	M14-2	✓	12000	Medium
14240-32	4" (98mm)	M10-1.5	✓	12000	Medium
14245-12	4.5" (113mm)	5/8"-11	✓	10000	Medium
14245-22	4.5" (113mm)	M14-2	✓	10000	Medium
14250-12	5" (123mm)	5/8"-11	✓	10000	Medium
14250-22	5" (123mm)	M14-2	✓	10000	Medium
14260-12	6" (148mm)	5/8"-11	✓	7000	Medium
14260-22	6" (148mm)	M14-2	✓	7000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
14270-12	7" (178mm)	5/8"-11	✓	5000	Medium
14270-22	7" (178mm)	M14-2	✓	5000	Medium
14270-32	7" (178mm)	M16-2	✓	5000	Medium



Item No.	Size	Thread	Velcro	Max.RPM	Density
16040-22	4" (100mm)	M14-2	✓	12000	Medium
16040-32	4" (100mm)	M10-1.5	✓	12000	Medium
16045-12	4.5" (113mm)	5/8"-11	✓	10000	Medium
16045-22	4.5" (113mm)	M14-2	✓	10000	Medium
16050-12	5" (122mm)	5/8"-11	✓	10000	Medium
16050-22	5" (122mm)	M14-2	✓	10000	Medium
16060-12	6" (148mm)	5/8"-11	✓	7000	Medium
16060-22	6" (148mm)	M14-2	✓	7000	Medium



2.1 Backing pads for Resin Fibre Discs (Injected)



Each Pad comes with metal clamping nut

Plastic Injected Backing pads


Work with high-speed right angle grinders
 Pad built with spiral cooling ribs
 Built of high impact-resistant material
 Customized flexibility and color available

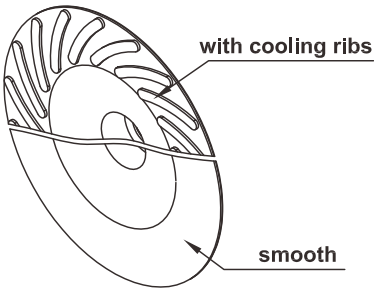

Item No.	Diameter	Thread	Abrasive	Flexibility	Face	Color	Max.RPM
61040-121	92mm	5/8"-11	4"	Medium	Spiral	Black	15000
61040-221	92mm	M14-2	4"	Medium	Spiral	Black	15000
61040-421	92mm	M10-1.5	4"	Medium	Spiral	Black	15000
61045-121	108mm	5/8"-11	4.5"	Medium	Spiral	Black	13000
61045-221	108mm	M14-2	4.5"	Medium	Spiral	Black	13000
61050-121	117mm	5/8"-11	5"	Medium	Spiral	Black	12000
61050-221	117mm	M14-2	5"	Medium	Spiral	Black	12000
61070-121	172mm	5/8"-11	7"	Medium	Spiral	Black	8000
61070-221	172mm	M14-2	7"	Medium	Spiral	Black	8000

Each pad is supplied with a clamping nut.
 Smooth face pad is available for customized orders only.

Clamping Nut

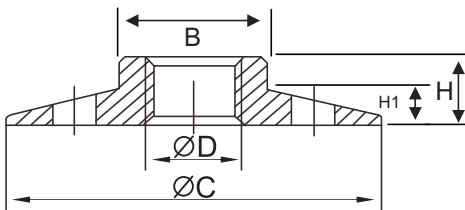

Item No.	C	D	H	H1	B	Material	For Pad
CN-55-5/8	55 mm	5/8"-11	10.5 mm	6 mm	22 mm	Zinc-Alloy	6"-8"
CN-55-M14	55 mm	M14-2	10.5 mm	6 mm	22 mm	Zinc-Alloy	6"-8"
CN-45-5/8	45 mm	5/8"-11	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"
CN-45-M14	45 mm	M14-2	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"
CN-45-M10	45 mm	M10-1.5	12 mm	4 mm	22 mm	Zinc-Alloy	4"-5"

Backing pads for Resin Fibre Discs(no clamp nut)

Pad does not come with clamp nut, instead it uses the flange and lock nut of angle grinder



Item No.	Diameter	Hole	Disc Size	Flexibility	Face	Color	Max.RPM
61230	74mm	16 mm	3"- 4"	Medium	Spiral	Black	15000
61240	92mm	16 mm	4"	Medium	Spiral	Black	15000
61245	108mm	22 mm	4.5"	Medium	Spiral	Black	13000
61250	117mm	22 mm	5"	Medium	Spiral	Black	12000
61270	172mm	22 mm	7"	Medium	Spiral	Black	8000

2.2 Rubber Molded Backing pads for Resin Fibre Discs

Rubber Molded Backing pads

Rubber molded Heavy-Duty Backing Pads
Work with high-speed right angle grinders
Pad built with spiral cooling ribs
Threaded metal hub



Item No.	Diameter	Thread	Disc Size	Density	Face	Color	Max.RPM
69040-1	92mm	5/8"-11	4"	Medium	Spiral	Black	15000
69045-1	107mm	5/8"-11	4.5"	Medium	Spiral	Black	13000
69050-1	117mm	5/8"-11	5"	Medium	Spiral	Black	12000
69060-1	142mm	5/8"-11	6"	Medium	Spiral	Black	8000
69070-1	172mm	5/8"-11	7"	Medium	Spiral	Black	8000
69080-1	192mm	5/8"-11	8"	Medium	Spiral	Black	8000
69090-1	220mm	5/8"-11	9"	Medium	Spiral	Black	8000




3.1 DA Pads Introduction




Why shall you try SunnyPads DA pads ?


- 1) Most of all our DA pads are PolyUrethane molded, it is strong and durable to meet the toughest works.
- 2) Long validity period : With our unique formulation, most of our DA pads are Okay to be stored for up to 5 years and keep good flexibility and strength.
- 3) Every pad is inspected per weight / balance / run-out standards, ensure it is free of vibration on user's sander.
- 4) We use the best quality hook & Vinyl, the life time is guaranteed.
- 5) We have wide range of specifications available for your choose, we also accept customized design.

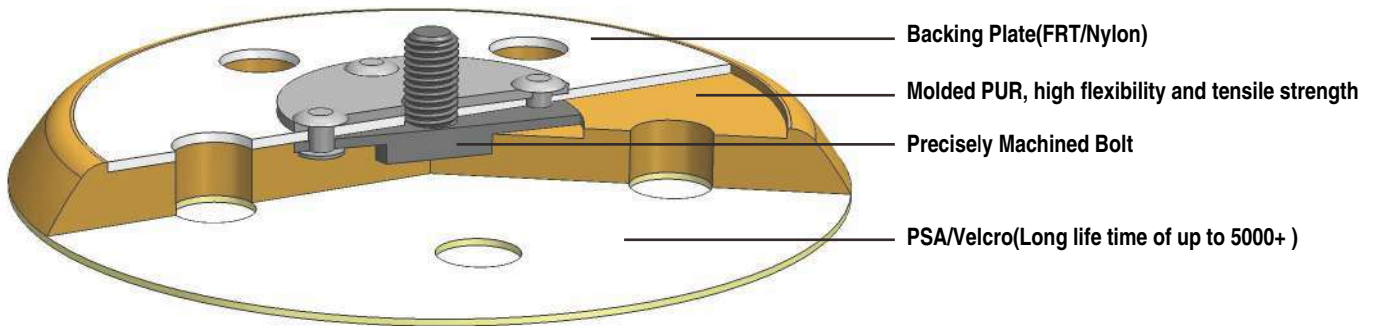

5" Sanding Pad Hole Pattern

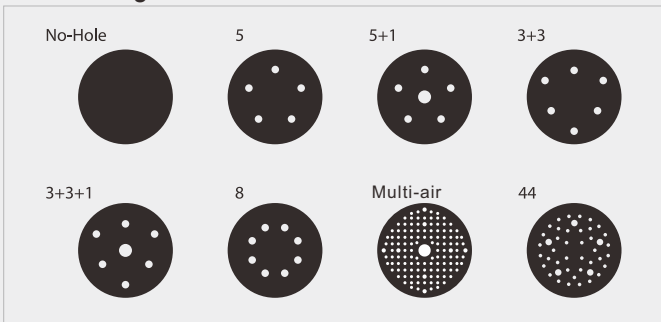

6" Sanding Pad Hole Pattern

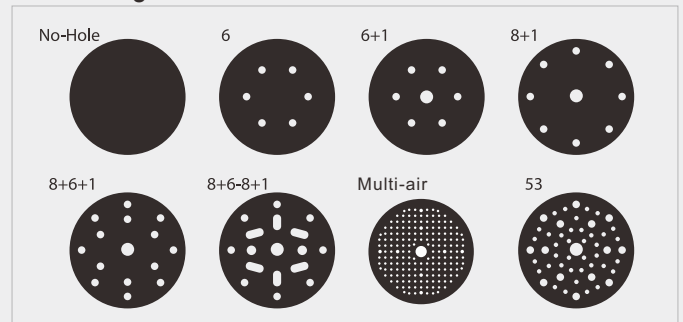

3.2 1"~3.5" DA backing pads

Work with air sanding machines for spot sanding.



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Foam Thickness
14410-11	1" (25mm)	1/4"-20 Int		√	20000	Soft	no hole	n/a	10mm
14410-12	1" (25mm)	1/4"-20 Int	√		20000	Soft	no hole	n/a	10mm
14412-11	1.2" (31mm)	1/4"-20 Int		√	20000	Soft	no hole	n/a	10mm
14412-12	1.2" (31mm)	1/4"-20 Int	√		20000	Soft	no hole	n/a	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22120-11	2" (50mm)	5/16"-24		√	20000	Medium	no hole	21g	9mm
22120-12	2" (50mm)	5/16"-24	√		20000	Medium	no hole	21g	9mm
22120-21	2" (50mm)	M6		√	20000	Medium	no hole	21g	9mm
22120-22	2" (50mm)	M6	√		20000	Medium	no hole	21g	9mm
22130-11	3" (74mm)	5/16"-24		√	20000	Medium	no hole	28g	10mm
22130-12	3" (74mm)	5/16"-24	√		20000	Medium	no hole	28g	10mm
22130-21	3" (74mm)	M6		√	20000	Medium	no hole	28g	10mm
22130-22	3" (74mm)	M6	√		20000	Medium	no hole	28g	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22330-121	3" (74mm)	5/16"-24	√		20000	Medium	no hole	30g	10mm
22330-221	3" (74mm)	1/4"-20	√		20000	Medium	no hole	30g	10mm
22336-121	3" (74mm)	5/16"-24	√		20000	Medium	6	30g	10mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
26030-1	3" (74mm)	5/16"-24		√	12000	Soft / Medium	no hole	80g	13mm
26030-2	3" (74mm)	5/16"-24	√		12000	Soft / Medium	no hole	80g	13mm
26035-1	3.5" (89mm)	5/16"-24		√	12000	Medium	no hole	85g	13mm
26035-2	3.5" (89mm)	5/16"-24	√		12000	Medium	no hole	85g	13mm

3.3 Classic DA Pads

Dual Actional Sander Backing Pads, low profile

PUR molded, Medium density, good balance between performance and cost
Pad with fixed 5/16"-24 bolt




Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21040-2	4"(98mm)	5/16"-24	√		12000	Medium	no hole	100g	14.5mm
21050-1	5" (123mm)	5/16"-24		√	12000	Medium	no hole	100g	9.5mm
21050-2	5" (123mm)	5/16"-24	√		12000	Medium	no hole	100g	9.5mm
21150-1	5" (123mm)	5/16"-24		√	12000	Medium	3+3	100g	9.5mm
21150-2	5" (123mm)	5/16"-24	√		12000	Medium	3+3	100g	9.5mm
21250-1	5" (123mm)	5/16"-24		√	12000	Medium	5	100g	9.5mm
21250-2	5" (123mm)	5/16"-24	√		12000	Medium	5	100g	9.5mm
21350-1	5" (123mm)	5/16"-24		√	12000	Medium	8	100g	9.5mm
21350-2	5" (123mm)	5/16"-24	√		12000	Medium	8	100g	9.5mm



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21060-1	6" (148mm)	5/16"-24		√	12000	Medium	no hole	125g	9.5mm
21060-2	6" (148mm)	5/16"-24	√		12000	Medium	no hole	125g	9.5mm
21160-1	6" (148mm)	5/16"-24		√	12000	Medium	6	125g	9.5mm
21160-2	6" (148mm)	5/16"-24	√		12000	Medium	6	125g	9.5mm

Dual Actional Sander Backing Pads, middle profile, bevel edge

PUR molded, Soft density, Ideal for contour sanding
Pad with fixed 5/16"-24 bolt

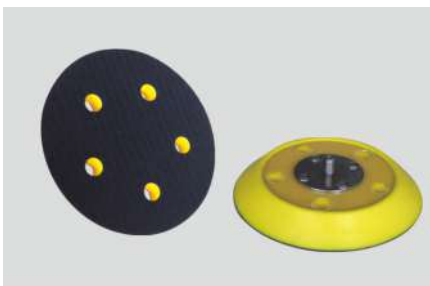

Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
22050-1	5" (123mm)	5/16"-24		√	12000	Soft	no hole	100g	14.5mm
22050-2	5" (123mm)	5/16"-24	√		12000	Soft	no hole	100g	14.5mm
22250-1	5" (123mm)	5/16"-24		√	12000	Soft	5	100g	14.5mm
22250-2	5" (123mm)	5/16"-24	√		12000	Soft	5	100g	14.5mm
22060-1	6" (148mm)	5/16"-24		√	12000	Soft	no hole	125g	14.5mm
22060-2	6" (148mm)	5/16"-24	√		12000	Soft	no hole	125g	14.5mm

3.4 Pro-Quality DA Backing Pads



The backing pad is the key component for building a non-vibration air sander. SunnyPads offer this range of backing pads with guaranteed vibration-free, precise weight, and high durability.



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23050-1	5" (123mm)	5/16"-24		✓	12000	Medium	no hole	100g	8.7mm
23050-2	5" (123mm)	5/16"-24	✓		12000	Medium	no hole	100g	8.7mm
23250-1	5" (123mm)	5/16"-24		✓	12000	Medium	5	100g	8.7mm
23250-2	5" (123mm)	5/16"-24	✓		12000	Medium	5	100g	8.7mm
23060-1	6" (148mm)	5/16"-24		✓	12000	Medium	no hole	125g	8.7mm
23060-2	6" (148mm)	5/16"-24	✓		12000	Medium	no hole	125g	8.7mm
23160-1	6" (148mm)	5/16"-24		✓	12000	Medium	6	125g	8.7mm
23160-2	6" (148mm)	5/16"-24	✓		12000	Medium	6	125g	8.7mm

Remark: Use J-hook.




Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
23550-1	5" (123mm)	5/16"-24		✓	12000	Medium	no hole	100g	8.7mm
23550-2	5" (123mm)	5/16"-24	✓		12000	Medium	no hole	100g	8.7mm
23555-1	5" (123mm)	5/16"-24		✓	12000	Medium	5	100g	8.7mm
23555-2	5" (123mm)	5/16"-24	✓		12000	Medium	5	100g	8.7mm
23560-1	6" (148mm)	5/16"-24		✓	12000	Medium	no hole	125g	8.7mm
23560-2	6" (148mm)	5/16"-24	✓		12000	Medium	no hole	125g	8.7mm
23566-1	6" (148mm)	5/16"-24		✓	12000	Medium	6	125g	8.7mm
23566-2	6" (148mm)	5/16"-24	✓		12000	Medium	6	125g	8.7mm

Remark: Use micro-hook.



The Pro-Quality level DA pads are designed and manufactured specially for professional air sander building, the pads are 100% tested and they are assured to be in compliance with high requirement of strength, run-out, balance, weight, flatness, and also less vibration.

3.5 Dust Free Sanding Pads

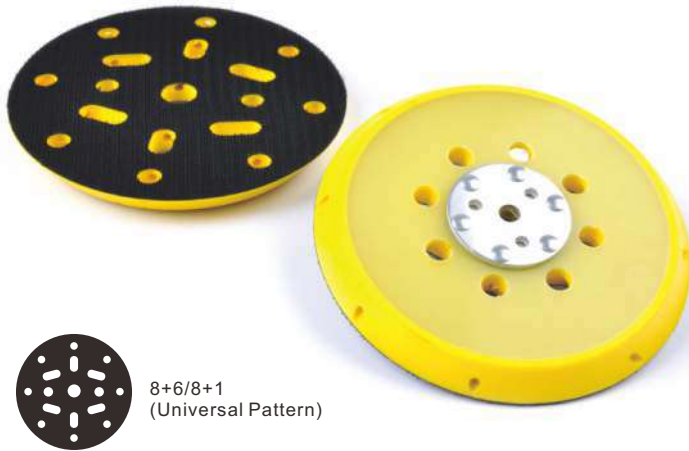

8+6/8+1
(Universal Pattern)

Dual Action Sander Backing Pads with Side Hole

- PUR molded, Medium density , good durability.
- Pad with optional bolt for 5/16"-24 and M8
- Better cooling and less dust while sanding

Mounting Accessories:



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21780-02	6" (148mm)	M8 & 5/16"	✓		12000	Medium	8+6/8+1	140g	11.5mm




3+3+1

Soft Density Dual Action Sander Backing Pads

- Side and center holes to benefit dust suction performance
- Soft density, ideal for fine sanding or primer sanding



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
25150-11	5" (123mm)	5/16"-24		✓	12000	Soft	3+3+1	100g	11.5mm
25150-12	5" (123mm)	5/16"-24	✓		12000	Soft	3+3+1	100g	11.5mm

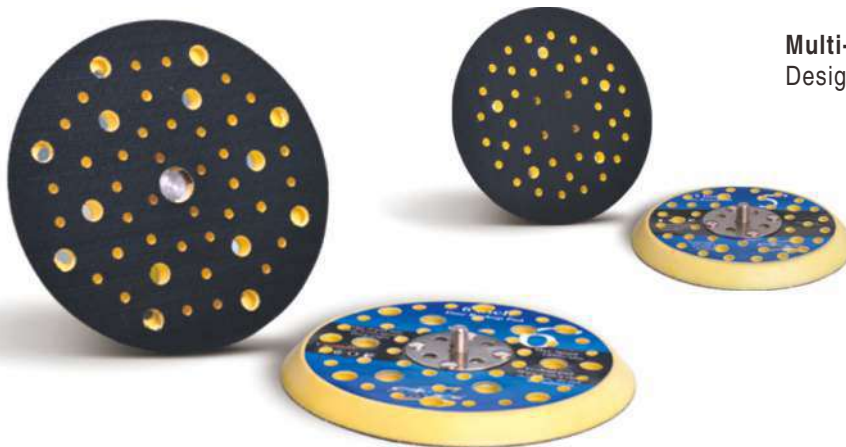

Multi-hole DA pads

- Designed to work with net abrasive for dust-free sanding

Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
21650-2	5" (123mm)	5/16"-24	✓		12000	Medium	44	100g	9.5mm
21660-2	6" (148mm)	5/16"-24	✓		12000	Medium	53	125g	8.5mm

3.6 Dust Devil™ V3 DA Pads

Dust Devil™ V3 Innovative Universal Sanding Pad


- ✓ Creative dust cover design.
- ✓ Universal hole pattern.
- ✓ Available with medium and soft density.
- ✓ Pad is well balanced for smooth sanding.
- ✓ Fixed-bolt or changeable-bolt version.
- ✓ Changeable-bolt version fits Festool/Rupes/Makita Sanders.




Item No.	Size	Thread	Velcro	Max.RPM	Density	Hole	Weight	Thickness
23860-021	6" (148mm)	M8 and 5/16"	✓	12000	Medium	8+6+1	145g *	12mm
23862-021	6" (148mm)	M8 and 5/16"	✓	12000	Medium	8+1	145g *	12mm
23868-021	6" (148mm)	M8 and 5/16"	✓	12000	Medium	8+8+1	145g *	12mm
23866-021	6" (148mm)	M8 and 5/16"	✓	12000	Medium	8+6/8+1	145g *	12mm
23860-121	6" (148mm)	Fixed 5/16"	✓	12000	Medium	8+6+1	130g	12mm
23862-121	6" (148mm)	Fixed 5/16"	✓	12000	Medium	8+1	130g	12mm
23868-121	6" (148mm)	Fixed 5/16"	✓	12000	Medium	8+8+1	130g	12mm
23866-121	6" (148mm)	Fixed 5/16"	✓	12000	Medium	8+6/8+1	130g	12mm

* Weight includes adaptor, washer and bolt.

Mounting Accessories:

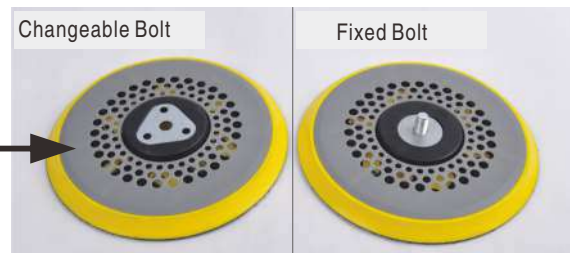

Fits Disc Hole Pattern:

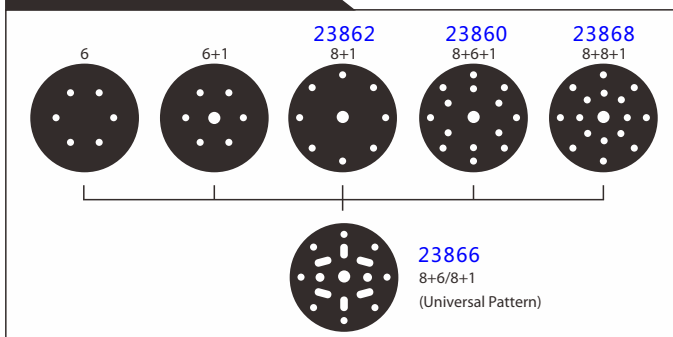


Pads are available with soft density in white color e.g. 23860S-021 for soft version.

3.7 Dust Free Sanding Pads


Multi-hole DA Backing Pads of Vibration-Free

- Premium vibration-free technics for smooth sanding
- Multi-hole design to comply different sanding discs pattern
- Work with mesh sanding discs
- Variety of hole configurations available

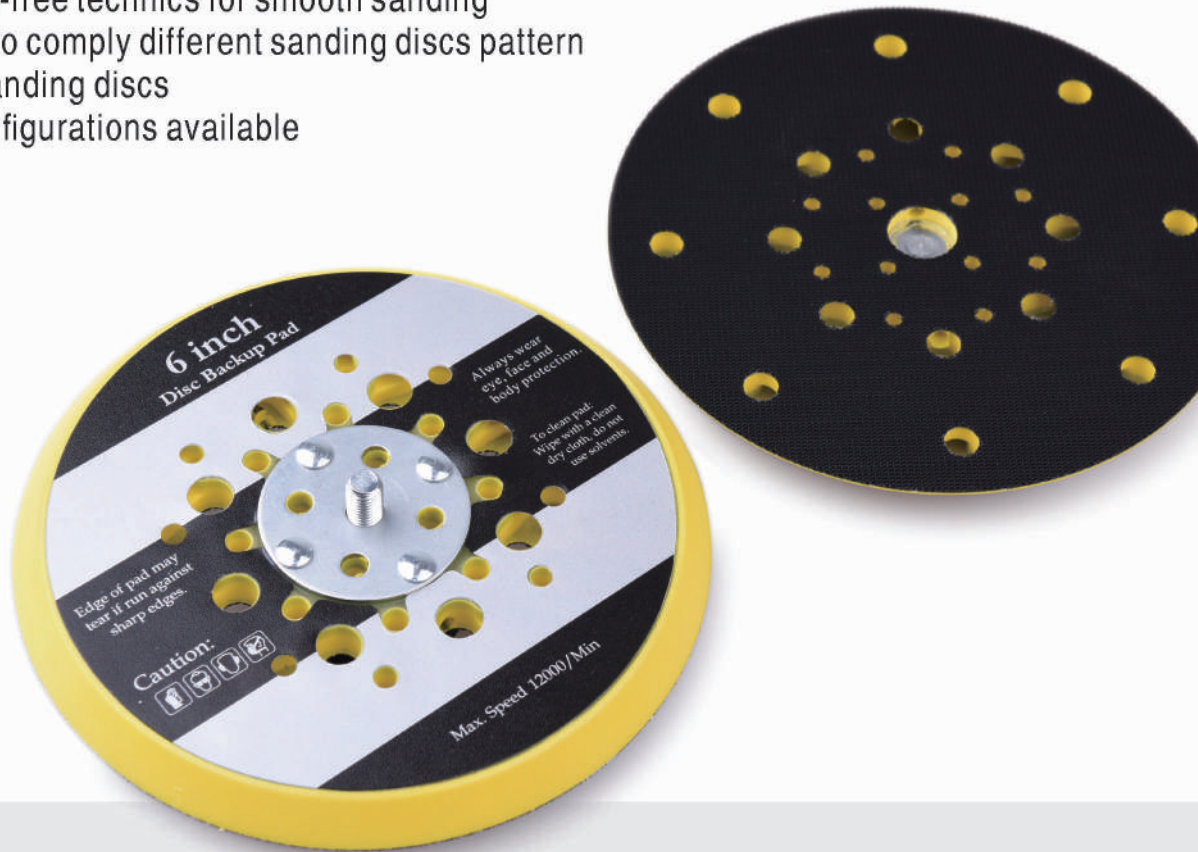


Hole Pattern:

28060




8+6+1
(15H)

28068




8+8+1
(17H)

28065



Multi-Hole
(Universal Pattern)

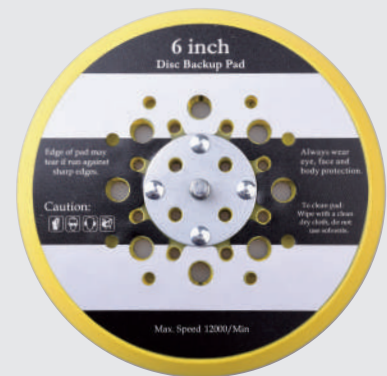

Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Hole	Weight	Thickness
28060-2	6" (148mm)	5/16"	✓		12000	Medium	8+6+1	130g	10mm
28068-2	6" (148mm)	5/16"	✓		12000	Medium	8+8+1	130g	10mm
28065-2	6" (148mm)	5/16"	✓		12000	Medium	Multi-Hole	130g	10mm

Pads are available with soft density in white color
e.g. 28060S-2 for soft version.

3.8 Interface Pads

Interface Cushion pads with extra-soft foam layer



Cushion pads are available in customized sizes and shapes.

Item No.	Size	Foam Thickness	Hole	Density	Remark
72200	6" (148mm)	10mm	no hole	Extra Soft	
72201	6" (148mm)	10mm	8+6+1	Extra Soft	
72202	6" (148mm)	10mm	53	Extra Soft	
72204	6" (148mm)	10mm	6+1	Extra Soft	
72205	6" (148mm)	10mm	6	Extra Soft	
72207	6" (148mm)	10mm	8+1	Extra Soft	
72208	6" (148mm)	10mm	8+6-8+1	Extra Soft	
72209	6" (148mm)	10mm	8+8+1	Extra Soft	
72220	5" (123mm)	10mm	no hole	Extra Soft	
72221	5" (123mm)	10mm	5+1	Extra Soft	
72222	5" (123mm)	10mm	44	Extra Soft	
72223	5" (123mm)	10mm	3+3	Extra Soft	
72224	5" (123mm)	10mm	8+1	Extra Soft	
72226	5" (123mm)	10mm	5	Extra Soft	
72227	5" (123mm)	10mm	3+3+1	Extra Soft	
72240	3" (74mm)	10mm	n/a	Extra Soft	
72250	2" (50mm)	10mm	n/a	Extra Soft	

Pad velcro protector



Item No.	Size	Foam Thickness	Hole	Density	Remark
72281	5" (123mm)	n/a	no hole	n/a	
72285	5" (123mm)	n/a	44	n/a	
72288	5" (123mm)	n/a	3+3+1	n/a	
72286	6" (148mm)	n/a	53	n/a	
72282	6" (148mm)	n/a	15	n/a	
72283	6" (148mm)	n/a	6	n/a	
72284	6" (148mm)	n/a	8+1	n/a	
72287	6" (148mm)	n/a	8+6-8+1	n/a	
72290	6" (148mm)	n/a	8+8+1	n/a	

Interface Cushion pads with higher density foam layer



Item No.	Size	Foam Thickness	Hole	Density	Remark
72229	6" (148mm)	10mm	6 Hole	Medium	
72225	5" (123mm)	12mm	n/a	Medium	
72241	3" (74mm)	12mm	n/a	Medium	
72301	75x100mm	20mm	n/a	Medium	Rectangle
72302	75x100mm	15mm	n/a	Medium	Rectangle



PSA-Velcro Converter




Item No.	Size	Cushion Thickness	Hole	Density	Remark
72291C	2" (50mm)	3mm	no hole	Medium	PSA - Loop
72292C	3" (75mm)	3mm	no hole	Medium	PSA - Loop
72291	2" (50mm)	n/a	no hole	n/a	PSA - Loop
72292	3" (75mm)	n/a	no hole	n/a	PSA - Loop




4.1 Roloc Disc Holders and Pads


Rubber Molded Roloc Disc Holders In Medium & Hard Flexibility



Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-11	23mm	1/4"-20	1"	55(M)	TR	30000
32020M-11	45mm	1/4"-20	2"	55(M)	TR	30000
32030M-11	69mm	1/4"-20	3"	55(M)	TR	25000
32040M-11	98mm	1/4"-20	4"	55(M)	TR	20000
32010H-11	23mm	1/4"-20	1"	85(H)	TR	30000
32020H-11	45mm	1/4"-20	2"	85(H)	TR	30000
32030H-11	69mm	1/4"-20	3"	85(H)	TR	25000
32040H-11	98mm	1/4"-20	4"	85(H)	TR	20000



Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-12	23mm	1/4"-20	1"	55(M)	TS	30000
32020M-12	45mm	1/4"-20	2"	55(M)	TS	30000
32030M-12	69mm	1/4"-20	3"	55(M)	TS	25000
32040M-12	98mm	1/4"-20	4"	55(M)	TS	20000
32010H-12	23mm	1/4"-20	1"	85(H)	TS	30000
32020H-12	45mm	1/4"-20	2"	85(H)	TS	30000
32030H-12	69mm	1/4"-20	3"	85(H)	TS	25000
32040H-12	98mm	1/4"-20	4"	85(H)	TS	20000



Item No.	Diameter	Thread	Abrasive	Flexibility	Type	Max.RPM
32010M-13	23mm	1/4"-20	1"	55(M)	TP	30000
32020M-13	45mm	1/4"-20	2"	55(M)	TP	30000
32030M-13	69mm	1/4"-20	3"	55(M)	TP	25000
32040M-13	98mm	1/4"-20	4"	55(M)	TP	20000
32010H-13	23mm	1/4"-20	1"	85(H)	TP	30000
32020H-13	45mm	1/4"-20	2"	85(H)	TP	30000
32030H-13	69mm	1/4"-20	3"	85(H)	TP	25000
32040H-13	98mm	1/4"-20	4"	85(H)	TP	20000

Soft interface pads for Velcro and PSA discs



Item No.	Size	Thread	Velcro	PSA	Density	Thickness
31112-1	1.2" (31mm)	R-lock		✓	Ultra-Soft	10mm
31112-2	1.2" (31mm)	R-lock	✓		Ultra-Soft	10mm

Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
310015	30mm	R-lock	✓	6000	Ultra-Soft	20mm
31002	2" (50mm)	R-lock	✓	6000	Ultra-Soft	20mm
31003	3" (74mm)	R-lock	✓	6000	Ultra-Soft	20mm

4.2 Eraser Pads

- **Fast removal of Pinstripes, Adhesive and Double Faced Tape**
- **Molded of specially modulated rubber, no damage to paint**
- **1/4" Drill Adaptor included**



Item No.	Diameter	Thickness	Thread	Max.RPM
32135	3.5" (88mm)	15mm	5/16"-24	4000



Item No.	Diameter	Thickness	Thread	Max.RPM
32140	4" (100mm)	20mm	5/16"-24	4000



Item No.	Diameter	Thickness	Thread	Max.RPM
32240	4" (100mm)	25mm	5/16"-24	4000



Item No.	Diameter	Thickness	Thread	Max.RPM
32241	4" (100mm)	25mm	n/a	4000

5.1 Drill Pads, Thread Adaptors

PUR molded, high flexibility and durability.
Available densities: Soft (White PUR), Medium (Yellow PUR)



Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
22220-22C	2" (50mm)	M6(Female)	✓	5000	Medium	11mm
22230-22C	3" (74mm)	M6(Female)	✓	5000	Medium	11.5mm

Item No.	Size	Thread	Velcro	Max.RPM	Density	Thickness
22222-22	2" (50mm)	M6	✓	5000	Soft	20mm
22232-22	3" (70mm)	M6	✓	5000	Soft	20mm



Thread Adaptors



Item No.	Thread	Shank Size	Remark
72001	5/8"-11	6mm	
72002	M16-2	6mm	
72003	M14-2	6mm	
72004	M6-1	6mm	
72005	M14-2	8mm	
72011	1/4"-20 (Interior)	6mm	Long Shaft
72007	M10-1.5	6mm	
72008	1/4"-20	6mm	



Item No.	Internal Thread	External Thread	Remark
72101	5/8"-11	5/8"-11	For Double Side wool pads
72102	M14	5/8"-11	For Double Side wool pads
72103	M16	5/8"-11	For Double Side wool pads
72104	M14	M16	


Item No.	Thread	Thread	Remark
72121	5/16"-24	M6-1	
72122	5/16"-24	1/4"-20	



Sunny-Block

Complete Range of Hand Sanding Tools

A trademark of SunnyPads



Spot Repair



Round Disc Hand Block



Rectangle Hand Block



Dust-Free Sanding Pad



Dry-Wall Sanding Pad



Wax Applicator


6.1 Hand Pads



De-Nebbing Blocks



Item No.	Diameter	Velcro	PSA	Density	Remark
71112	30mm	✓	✓	Hard	



Item No.	Diameter	Velcro	PSA	Density	Remark
71115-1	24mm		✓	Medium	
71116-1	30mm		✓	Medium	
71117-1	34mm		✓	Medium	

Round Disc Hand Pads



Item No.	Diameter	Velcro	PSA	Density	Remark
71130-1	3" (72.5mm)		✓	Medium	no center hole, slight bigger size
71130-2	3" (72.5mm)	✓		Medium	no center hole, slight bigger size
71131-1	3" (72.5mm)		✓	Soft	with center hole for water storage
71131-2	3" (72.5mm)	✓		Soft	with center hole for water storage



Item No.	Diameter	Velcro	PSA	Density	Remark
71132A-1	3" (72.5mm)		✓	Soft	no center hole
71132A-2	3" (72.5mm)	✓		Soft	no center hole
71132-1	3" (72.5mm)		✓	Soft	with center hole for water storage
71132-2	3" (72.5mm)	✓		Soft	with center hole for water storage



Item No.	Diameter	Velcro	PSA	Density	Remark
71135	3.5" (90mm)	✓		Medium	
71150	5" (123mm)	✓		Medium	



Item No.	Disc Size	Velcro	PSA	Density	Remark
71450-1	5" (125mm)		✓	Medium	
71450-2	5" (125mm)	✓		Medium	
71460-1	6" (150mm)		✓	Medium	
71460-2	6" (150mm)	✓		Medium	



Item No.	Disc Size	Velcro	PSA	Density	Remark
71001	5" (125mm)	✓		Medium	
71002	6" (150mm)	✓		Medium	

6.2 Hand Pads



Item No.	Size	Velcro	PSA	Density	Remark
71235	66x140 mm	✓		Medium	

Item No.	Size	Velcro	PSA	Density	Remark
71544-1	66 x 122 mm		✓	Medium	
71544-2	66 x 122 mm	✓		Medium	
71545-1	70 x 198 mm		✓	Medium	With Reinforced flat base
71545-2	70 x 198 mm	✓		Medium	With Reinforced flat base

Item No.	Size	Velcro	PSA	Density	Remark
71335-1	66 x 122 mm		✓	Medium	
71335-2	66 x 122 mm	✓		Medium	
71335S-2	66 x 122 mm	✓		Soft	

Item No.	Size	Density	Color
71205	125x70 mm	Medium	Black
71208	200x70 mm	Medium	Black
71204	125x70 mm	Rigid *	Black

*Lower portion of 71204 is molded of rigid plastic.
(Abrasive paper need to order separately)

- Super Light-Weight
- Comfortable holding
- PUR molded, no smell



Hand File for flat face sanding



Item No.	Size	Velcro	PSA	Flexibility
71501-21	70x400 mm		✓	Rigid
71501-22	70x400 mm	✓		Rigid
71503-21	70x420 mm		✓	Rigid
71503-22	70x420 mm	✓		Rigid

Item No.	Size	Velcro	PSA	Flexibility
71612-12	67x400 mm		✓	Rigid
71612-22	67x400 mm	✓		Rigid



PUR Moulded flexible hand file



Item No.	Size	Velcro	PSA	Flexibility
71510-1	71x440 mm		✓	Flexible
71510-2	71x440 mm	✓		Flexible



6.3 Dust-free Hand Sanding Blocks



Item No.	Size(mm)	Color
73005	125x70	Red or White
73008	200x70	Red or White
73016	400x70	Red or White
73009	230x115	Red or White

125x70



230x115



200x70



400x70




Hand block comes with air-valve, and an extra adaptor for use with bigger size hose

Dust Hose & Kit



Item No.	Desc.	Hose Dia.	Remark
73003	Dust Hose	20mm	4 meter
73002	Cone Adaptor	20mm	Dia.28-59mm
73003K	Hose&Adaptor Kit	20mm	*

* Universal Vacuum Cleaner Adaptor (fits 28-59mm port)



7.1 Stone Working Pads and felt mops

PUR Moulded Backing Pads

Medium-high density as Rubber , with center hole for water supply



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Thickness
10130H-1	3" (74mm)	5/8"-11	✓		12000	Medium+	15.5mm
10130H-2	3" (74mm)	M14-2	✓		12000	Medium+	15.5mm
10130H-3	3" (74mm)	M10-1.5	✓		12000	Medium+	15.5mm
10131H-1	3.1" (80mm)	5/8"-11	✓		10000	Medium+	15.5mm
10131H-2	3.1" (80mm)	M14-2	✓		12000	Medium+	15.5mm
10131H-3	3.1" (80mm)	M10-1.5	✓		12000	Medium+	15.5mm
10140H-1	4" (98mm)	5/8"-11	✓		12000	Medium+	15.5mm
10140H-2	4" (98mm)	M14-2	✓		12000	Medium+	15.5mm
10140H-3	4" (98mm)	M10-1.5	✓		12000	Medium+	15.5mm
10250-11	5" (122mm)	5/8"-11		✓	10000	Medium+	15.5mm
10250-12	5" (122mm)	5/8"-11	✓		10000	Medium+	15.5mm
10250-21	5" (122mm)	M14-2		✓	10000	Medium+	15.5mm
10250-22	5" (122mm)	M14-2	✓		10000	Medium+	15.5mm

PUR Moulded Backing Pads



Item No.	Size	Thread	Velcro	PSA	Max.RPM	Density	Thickness
12581-11	5" (123mm)	5/8"-11		✓	10000	Medium	27.5mm
12581-12	5" (123mm)	5/8"-11	✓		10000	Medium	27.5mm

Remark: Optional Canvas face on demand.

Felt Mops



Item No.	Size	Thread	Max.RPM
47050-1	125x20mm	5/8"-11	12000
47050-2	125x20mm	M14	12000
47070-1	180x20mm	5/8"-11	7000
47070-2	180x20mm	M14	7000

Applicable for stone working / glass polishing with water.

Felt Disc with velcro



Item No.	Size	Velcro	Max.RPM
47120-2	55x6 mm	✓	12000
47130-2	80x6 mm	✓	12000
47140-2	100x6 mm	✓	12000
47145-2	115x6 mm	✓	12000
47150-2	125x6 mm	✓	12000
47160-2	150x6 mm	✓	7000

Applicable for stone working / glass polishing / Stainless Steel polishing


8.1 Foam Pads



- ✓ Designed for paint refinishing and detailing works
- ✓ Professional bonding process
- ✓ Withstand high-temperature and water wash
- ✓ Polyester sponge made in Europe and the U.S.
- ✓ Excellent tensile strength and durability
- ✓ Full range of material from heavy cutting to finishing


Foam Color Code and Specifications

CUT
Level




Green T120 heavy cut foam is in solid construction, it fast removes the deep scratches, over spray, 1200/1500# sanding disc marks, and heavy oxidation. Cut like wool pad and leave high gloss finish. Applicable for scratch resistant and high solid ceramic paints.

T120



Yellow T80 high cut foam has an intensive cutting action that will remove deep scratches, over spray, severe swirl marks, 1500# sanding disc marks, and heavy oxidation when used with heavy polishing compounds.

T80



Blue & Maroon T60 foam has moderate cutting action that will remove 1500/2000# sand scratches, over spray, and surface imperfections when used in conjunction with polishing compounds.

T60



Orange T40 foam has a light cutting action, and will remove scratches and swirl marks while leaving a level and smooth surface, can be used in conjunction with heavy polishing compounds or micro-fine compounds for one-step polishing.

T40



Red & Gray T10 foam has very light cleaning action for removal of ultra-fine swirl marks, car wash scratches, and hazing, leaving a swirl-free gloss finish when used in conjunction with finishing polishes.

T10

8.2 Foam Pads Classic Range

Flat Face Foam Pads (None Recessed Velcro)

T80 Yellow




Item No.	Size	DxHxV(mm)
3402310	3"	80x25x76
3402510	5"	125x25x100
3402610	6"	150x30x125
3402710	7"	180x30x150
3402810	8"	200x30x180

T60 Blue



Item No.	Size	DxHxV(mm)
3402360	3"	80x25x76
3402560	5"	125x25x100
3402660	6"	150x30x125
3402760	7"	180x30x150
3402860	8"	200x30x180



The flat face is the most popular version, for experienced operators. It works at the highest efficiency for cutting and polishing.

T40 Orange



Item No.	Size	DxHxV(mm)
3402340	3"	80x25x76
3402540	5"	125x25x100
3402640	6"	150x30x125
3402740	7"	180x30x150
3402840	8"	200x30x180

T10 Gray



Item No.	Size	DxHxV(mm)
3402330	3"	80x25x76
3402530	5"	125x25x100
3402630	6"	150x30x125
3402730	7"	180x30x150
3402830	8"	200x30x180

Waffle Face Foam Pads (None Recessed Velcro)

T80 Yellow





Item No.	Size	DxHxV(mm)
3407310	3"	80x30x80
3407510	5"	125x30x115
3407610	6"	145x30x135
3407710	7"	180x30x170
3407810	8"	200x30x190

T60 Blue



Item No.	Size	DxHxV(mm)
3407360	3"	80x30x80
3407560	5"	125x30x115
3407660	6"	145x30x135
3407760	7"	180x30x170
3407860	8"	200x30x190



The waffle face pad dissipates heat and reduces risk of burning the vehicle's finish. The waves speed up the air flow between the paint and the foam pad to cool the pad against over heating, they also help to reduce holograms.

T40 Orange





Item No.	Size	DxHxV(mm)
3407340	3"	80x30x80
3407540	5"	125x30x115
3407640	6"	145x30x135
3407740	7"	180x30x170
3407840	8"	200x30x190

T10 Gray



Item No.	Size	DxHxV(mm)
3407330	3"	80x30x80
3407530	5"	125x30x115
3407630	6"	145x30x135
3407730	7"	180x30x170
3407830	8"	200x30x190

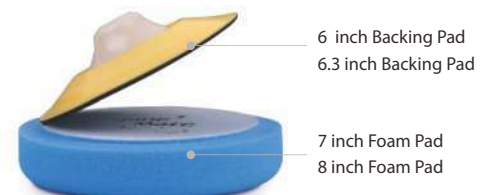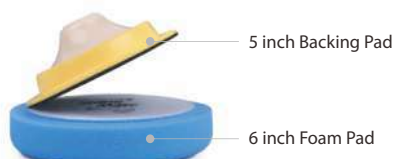

8.3 Diamond-Cross Foam Pads

6" & 7" Diamond Face Foam Pads (Recessed Velcro)





T80 Yellow

Item No.	Size	DxHxV(mm)
3408610	6"	150x35x125
3408710	7"	180x35x150



T60 Blue

Item No.	Size	DxHxV(mm)
3408660	6"	150x35x125
3408760	7"	180x35x150



The foam pad face is divided into many independent pieces by the diamond pattern, it speed up the air flow between the foam pad and the painted surface, disseminate the heat rapidly to lower the temperature of the working face, and keep high cutting efficiency like a flat face pad.



T40 Orange

Item No.	Size	DxHxV(mm)
3408640	6"	150x35x125
3408740	7"	180x35x150



T10 Gray

Item No.	Size	DxHxV(mm)
3408630	6"	150x35x125
3408730	7"	180x35x150



9" Diamond Face Foam Pads (Recessed Velcro)

- Recessed velcro for easy centering
- Specially cutted edge for narrow area polishing




T80 Yellow

Item No.	Size	Pattern
34079-1	9"	Diamond
34059-1	9"	Flat



T60 Blue

Item No.	Size	Pattern
34079-6	9"	Diamond
34059-6	9"	Flat



DxHxV(mm)
230x35x175



T40 Orange


Item No.	Size	Pattern
34079-4	9"	Diamond
34059-4	9"	Flat



T10 Gray

Item No.	Size	Pattern
34079-3	9"	Diamond
34059-3	9"	Flat

Work with:
6.8" Backing Pad

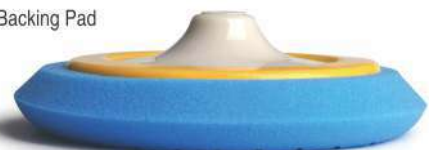

8.4 Specially Featured Foam pads & Wax Applicator

Foam Pads For DA(Orbital) Polishing

- ✓ Applicable for both Rotary & DA polishing
- ✓ Withstand high temperature and water wash



DA(dual action) or orbital polishing causes the extra horizontal moving and deformation of foam pads, also the heating that generated by the eccentric system may be built up inside the foam. This range of pads are specially designed to meet orbital polishing.



T120 Green

Item No.	Size
34124-9	4"
34126-9	6"
34127-9	7"



T40 Orange

Item No.	Size
34124-4	4"
34126-4	6"
34127-4	7"



T80 Yellow

Item No.	Size
34124-1	4"
34126-1	6"
34127-1	7"




T10 Red

Item No.	Size
34124-7	4"
34126-7	6"
34127-7	7"



T60 Blue

Item No.	Size
34124-6	4"
34126-6	6"
34127-6	7"



Size Description:

Size	DxHxV(mm)	Center Hole
4"	100x25x76	n/a
6"	150x25x127	22mm
7"	180x25x152	22mm

6" Foam Pads with Backing Plate

Size 150x50mm



Item No.	Foam	Thread
3414612	T80 Yellow High-Cut	M14
3414662	T60 Blue Fast-Cut	M14
3414642	T40 Orange Medium-Cut	M14
3414632	T10 Gray Finishing	M14
3414613	T80 Yellow High-Cut	M16
3414663	T60 Blue Fast-Cut	M16
3414643	T40 Orange Medium-Cut	M16
3414633	T10 6" Gray Finishing	M16

Wax Applicator & Cleaning Foam



- ✓ Hand pad for comfortable holding
- ✓ Medium foam for interior cleaning
- ✓ Soft foam for waxing and washing



3" Round Wax Applicator Kit:

Item. **71132K3**

Includes:

- 1x soft hand pad 74mm
- 1x soft foam pad 82mm
- 1x medium foam pad 82mm



Square Washing & Waxing Kit:

Item. **71335K3**

Includes:

- 1x soft hand pad 70x122mm
- 1x soft foam pad 87x155mm
- 1x medium foam pad 87x155mm


8.5 Double-side Foam Pads



Double-Side Foam Pads

Work with 5/8"-11 adaptor
or 3M Hex Quick-Connect


Connection:



5/8" Bolt On

3M Hex On

Double-Side Foam Pads (waffle)




Double-Side Foam Pads (flat face)




Size	Item No.	Connect	Item No.	Connect
T80 Yellow Foam				
6"	49760-11	5/8"	49760-10	Hex
7"	49770-11	5/8"	49770-10	Hex
8"	49780-11	5/8"	49780-10	Hex
T60 Blue Foam				
6"	49760-61	5/8"	49760-60	Hex
7"	49770-61	5/8"	49770-60	Hex
8"	49780-61	5/8"	49780-60	Hex
T40 Orange Foam				
6"	49760-41	5/8"	49760-40	Hex
7"	49770-41	5/8"	49770-40	Hex
8"	49780-41	5/8"	49780-40	Hex
T10 Gray Foam				
6"	49760-31	5/8"	49760-30	Hex
7"	49770-31	5/8"	49770-30	Hex
8"	49780-31	5/8"	49780-30	Hex

Size	Item No.	Connect	Item No.	Connect
T80 Yellow Foam				
6"	49060-11	5/8"	49060-10	Hex
7"	49070-11	5/8"	49070-10	Hex
8"	49080-11	5/8"	49080-10	Hex
T60 Blue Foam				
6"	49060-61	5/8"	49060-60	Hex
7"	49070-61	5/8"	49070-60	Hex
8"	49080-61	5/8"	49080-60	Hex
T40 Orange Foam				
6"	49060-41	5/8"	49060-40	Hex
7"	49070-41	5/8"	49070-40	Hex
8"	49080-41	5/8"	49080-40	Hex
T10 Red Foam				
6"	49060-71	5/8"	49060-70	Hex
7"	49070-71	5/8"	49070-70	Hex
8"	49080-71	5/8"	49080-70	Hex



Size	DxH(mm)
6"	150x50
7"	180x50
8"	200x50



Size	DxH(mm)
6"	150x40
7"	180x40
8"	200x40

8.6 Spot Polishing Pads

Extension Shaft (Hollow)



Item No.	Length	Int. Thread	Ext. Thread
ETS-80-14	80mm	M14	M14
ETS-80-58	80mm	5/8"-11	5/8"-11
ETS-40-14	40mm	M14	M14
ETS-40-58	40mm	5/8"-11	5/8"-11

1.2" Backing Plate and Pads:



Item No.	Desc.	Size	Remark
14212-24	Backing Plate	30mm(1.2")	M14
14212-14	Backing Plate	30mm(1.2")	5/8"-11
41515	Soft-Wool Pad	40 mm	
340215-9	Foam Pad	40x10 mm	Green T120
340215-6	Foam Pad	40x10 mm	Blue T60
340215-4	Foam Pad	40x10 mm	Orange T40
340215-7	Foam Pad	40x10 mm	Red T10
41215	Micro-Fiber Pad	40x6 mm	

2" Backing Plate and Pads:



Item No.	Desc.	Size	Remark
14220-24	Backing Plate	48mm(2")	M14
14220-14	Backing Plate	48mm(2")	5/8"-11
41520	Soft-Wool Pad	56 mm	
34022-9	Foam Pad	56x10 mm	Green T120
34022-6	Foam Pad	56x10 mm	Blue T60
34022-4	Foam Pad	56x10 mm	Orange T40
34022-7	Foam Pad	56x10 mm	Red T10
41220	Micro-Fiber Pad	56x6 mm	

3" Backing Plate and Pads:



Item No.	Desc.	Size	Remark
14231-24	Backing Plate	74mm(3")	M14
14231-14	Backing Plate	74mm(3")	5/8"-11
41530	Soft-Wool Pad	80 mm	
34023-9	Foam Pad	80x25 mm	Green T120
34023-6	Foam Pad	80x25 mm	Blue T60
34023-4	Foam Pad	80x25 mm	Orange T40
34023-7	Foam Pad	80x25 mm	Red T10
41230	Micro-Fiber Pad	80x6 mm	

Red foam may be replaced with Gray foam.
Blue foam may be replaced with Yellow foam.

8.7 Foam Polishing Balls and Cones

Polishing Balls with 6mm Shank



Item No.	Color
48230-16	Yellow
48230-86	Maroon
48230-66	Blue
48230-46	Orange
48230-76	Red (Ultra Fine)

Ball size 77mm
Comes with a 1/4"-20 threaded short 6mm shank
Optional long shank adaptor (Item No.72011)

Polishing Cones for corner and narrow area polishing

Use in conjunction with liquid polish for high-gloss restoration
Work with electric tools
Max.Speed 3500/min



Polishing Cones with 6mm shank

Item No.	Color	Mounting	Size	Density
48020-1	Yellow	6mm shank	Dia.80mm	Medium
48020-8	Maroon	6mm shank	Dia.80mm	Medium
48020-6	Blue	6mm shank	Dia.80mm	Medium
48020-4	Orange	6mm shank	Dia.80mm	Medium
48020-7	Red	6mm shank	Dia.80mm	Ultra Fine

Polishing Cones for Rotary Polisher

For narrow area paint polishing and wheel hub polishing
Use with mini rotary polisher
Max.Speed 3500/min



Item No.	Color	Mounting	Density
48130-12	Yellow	M14	Medium
48130-82	Maroon	M14	Medium
48130-62	Blue	M14	Medium
48130-42	Orange	M14	Medium
48130-72	Red	M14	Ultra Fine

9.1 Wool Pads



SunnyWool®
a trademark of SunnyPads

CUT
Level



4 PLY 100% TWISTED WOOL

T240

Each strand of high grade wool fiber is tightly twisted, allowing the pad to stay at consistent level of aggression for longer periods of operation. Heavy Cut.
Color: Natural.



1 PLY BLENDED WOOL - White

T200

A fiber combination for light compounding, comprised of single ply untwisted wool and acrylic blend. Allows the operator to accomplish a range of light compounding to heavier polishing tasks.
Color: White.



1 PLY BLENDED WOOL - Yellow

T180

A fiber combination for light compounding, comprised of single ply untwisted wool and acrylic blend. Allows the operator to accomplish a range of light compounding to heavier polishing tasks.
Color: White.



LAMBSWOOL SHEEPSKIN

T160

The electrification process removes the microscopic barbs from the hairs in the wool resulting in a soft and effective compounding material that does not scratch the painted surface.
Color: Natural.



100% KNITTED-WOOL HIGH-NAP

T160

Constructed of 100% wool knitted onto a synthetic backing. The quality is consistent compared to natural wool material.
Color: Natural.



100% KNITTED-WOOL SHORT-NAP

T140

Constructed of 100% wool knitted into a synthetic backing. The nap high is 6mm for finer polishing.
Color: Natural.



MICRO-FIBER

T05

Constructed of knitted polyester nano fiber with micro fiber at 1/10 diameter of natural wool fiber. Suitable for finer cutting and final finishing, gives higher gloss on paint. It also be used to apply the wax and sealant.
Color: White

9.2 Wool Pads

Wool Yarn Buffing Pads



Single Side Wool Pads

Item No.	Size	Color	Wool Spec.	Cutting Level
45080-11	7"	White	1-ply blended Wool	T200 Mid-Cut
45080-13	7"	Yellow	1-ply blended Wool	T180 Mid-Cut
45050-42	5"	Natural	4-ply 100% Wool	T240 Heavy-Cut
45060-42	6"	Natural	4-ply 100% Wool	T240 Heavy-Cut
45080-42	7"	Natural	4-ply 100% Wool	T240 Heavy-Cut

Double Side Wool Pads with 5/8" bolt

Item No.	Size	Color	Wool Spec.	Cutting Level
46070-11	7"	White	1-ply blended Wool	T200 Mid-Cut
46070-42	7"	Natural	4-ply 100% Wool	T240 Heavy-Cut
46080-11	8"	White	1-ply blended Wool	T200 Mid-Cut
46080-13	8"	Yellow	1-ply blended Wool	T180 Mid-Cut
46080-42	8"	Natural	4-ply 100% Wool	T240 Heavy-Cut

Lambswool (Sheepskin) Pad

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.
For Rotary Polisher use



Item No.	Size	Work With	Fastening
41030	76mm	3 inch Plate	Velcro
41050	125mm	5 inch Plate	Velcro
41060	150mm	6 inch Plate	Velcro
41070	180mm	7 inch Plate	Velcro



Knitted Wool Pad (High-Nap)

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation.
For Rotary Polisher use



Item No.	Size	Work With	Fastening
41120	56mm	2 inch Plate	Velcro
41130	80mm	3 inch Plate	Velcro
41150	130mm	5 inch Plate	Velcro
41160	155mm	6 inch Plate	Velcro
41170	185mm	7 inch Plate	Velcro



9.3 Wool Pads

Knitted Wool Pad Short-Nap (with foam cushion)

Short-Nap Wool pad is made of knitted 100% ultra-fine wool with nap height of 6mm. A soft cushion layer is laminated between wool and velour backing. Ideal to work with FlexEdge backing plates.

Remove deep scratches, overspray, 1200/1500# sanding disc marks, heavy oxidation. For Rotary & DA Polisher use.

CUT
T140



Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41360	6"(150mm)	5"	22mm	Gray(15mm)
41370	7"(180mm)	6"	22mm	Gray(15mm)

Knitted Wool Pad Short-Nap (No foam cushion)

CUT
T140




Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41530	3"(80mm)	3"	n/a	n/a
41535	3.5"(95mm)	3.5"	n/a	n/a
41540	4"(105mm)	4"	n/a	n/a
41550	5"(130mm)	5"	n/a	n/a
41560	6"(155mm)	6"	n/a	n/a
41570	7"(185mm)	7"	n/a	n/a

Micro-fiber Pad

Made of 100% polyester nano fiber, the customized manufacturing technics produces the micro fiber at 1/10 diameter of natural wool fiber.

It eliminate the swirls and leaves mirror gloss finish by working with final finish polish. For DA polisher use.

CUT
T05

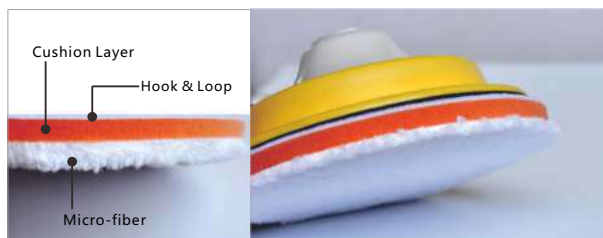

Item No.	Size	Backing Pad	Center Hole	Cushion Foam
41230	3"(80mm)	3"	n/a	Orange(6mm)
41235	3.5"(95mm)	3.5"	n/a	Orange(6mm)
41240	4"(105mm)	4"	n/a	Orange(6mm)
41250	5"(130mm)	5"	n/a	Orange(6mm)
41260	6"(155mm)	6"	n/a	Orange(6mm)
41270	7"(185mm)	7"	n/a	Orange(6mm)

Remark: Standard cushion foam color is Orange, it can be customized upon request. Orange/Yellow/Blue Foam is Medium Density. Gray Foam is Ultra-Soft.

10.1 FlexEdge Rotary Backing Plate

Backing Plate for Foam Pads and Wool Pads

The FlexEdge Urethane Backing Pads are the indispensable part to make a perfect carved surface polishing. The microcellular Urethane foam has good flexibility and can absorb the vibration, it is extremely durable to withstand the rigorous operation. The Velcro™ hook facing is adopted, it is molded with the Urethane foam and creates a permanent lamination.

FlexEdge



Item No.	Size	Thread	Face
14212-24	1.2"(30mm)	M14	Velcro
14220-24	2"(48mm)	M14	Velcro
14231-24	3"(74mm)	M14	Velcro
14212-14	1.2"(30mm)	5/8"-11	Velcro
14220-14	2"(48mm)	5/8"-11	Velcro
14231-14	3"(74mm)	5/8"-11	Velcro

Remark: PSA face or M10-1.5 thread are available upon demand.



Item No.	Size	Thread
13051-12	5" (123mm)	5/8"-11
13051-22	5" (123mm)	M14-2
13051-32	5" (123mm)	M16-2

Item No.	Size	Thread
13060-1	6" (150mm)	5/8"-11
13060-2	6" (150mm)	M14-2
13060-3	6" (150mm)	M16-2
13063-1	6.3" (160mm)	5/8"-11
13063-2	6.3" (160mm)	M14-2
13063-3	6.3" (160mm)	M16-2

Item No.	Size	Thread
12270-12	7" (180mm)	5/8"-11
12270-22	7" (180mm)	M14-2
12263-12	6.3" (160mm)	5/8"-11
12263-22	6.3" (160mm)	M14-2

Backing pads for recessed foam pads and wool buffing pads



Item No.	Size	Thread
13068-1	6.8" (175mm)	5/8"-11
13068-2	6.8" (175mm)	M14-2
13068-3	6.8" (175mm)	M16-2

Item No.	Size	Thread
14268-1	6.8" (175mm)	5/8"-11
14268-2	6.8" (175mm)	M14-2
14268-3	6.8" (175mm)	M16-2

Item No.	Size	Thread
14165-1	6.5" (165mm)	5/8"-11
14165-2	6.5" (165mm)	M14-2
14165-3	6.5" (165mm)	M16-2



Item No.	Size	Thread
10161-122	6" (152mm)	5/8"-11
10161-222	6" (152mm)	M14-2
10161-322	6" (152mm)	M16-2



11.1 Specially featured Backing Plate for Sanding Machine

Sander Backing Plates



27040
For EMM/Rupes Sander



27046



27010



Item No.	Size	Thread	Color	Hole	Weight
27046	73x98 mm	4 bolts	Yellow	10	40g
27040	115x225 mm	4 bolts	Yellow	n/a	170g
27010	70x77 mm	2 bolts	Yellow	n/a	n/a

Various size and thickness of interface pads available

Backing Plates for Dry-wall & large area sanding



Fits Dynabrade, Norton, Mirka sanders

Item No.	Size(mm)	Mounting	Color	Hole	Weight
27012	225x225x225	4 bolts	Black	12	230g

Item No.	Size	Mounting	Color	Hole	Weight
27680	8"(200mm)	Multi-Ways	Yellow	multi-hole	190g

Backing Plates for BOSCH Sanders



27450



27625

Item No.	Size	Mounting	Color	Hole	Weight
27450	5"(123mm)	8xM4	White	8	55g
27625	6"(148mm)	M8	Black	6	130g

27450 fits PEX 220 A, PEX 220 AE, Skil 7402 / 7490
27625 fits GEX 150, GEX 150 AC, GEX 150 Turbo


Backing Pads for Black&Deck/Poter-Cable/Dewalt/Makita Sanders



27550



27350



27460

Item No.	Size	Mounting	Color	Hole	Weight
27550	5" (123mm)	4 bolts	Black	8	55g
27350	5" (123mm)	3 bolts	Black	8	55g
27460	6" (148mm)	4 bolts	Black	6	80g

Our catalogue only shows part of our full range products, OEM/ODM products are not shown here. Please contact us if you can't find the articles you need.



Yongkang Meiloy-K&FP Tools Co.,Ltd.

Add: No.218 Meilong Road, West District, Yongkang City,
Zhejiang Province, China

Tel: +86-579-87182802 Fax: +86-579-87208230

E-mail: sales@sunnypads.cn [Http://www.SunnyPads.cn](http://www.SunnyPads.cn)

www.SunnyPads.cn

Dedicated in Surface Processing Pad Manufacturing