



**ATLAS
TAPES**


ATHENS
68 Varis Avenue
16673 Voula, Greece
Tel.: +30 210 8995388

ATALANTI
3rd km Skala Atalanti Road
35200 Atalanti, Greece
Tel.: +30 22330 23725

www.atlas-tapes.gr
info@atlas-tapes.gr

MASKING TAPE SOLVENT MSK 9410 LS/WR

TECHNICAL DATA SHEET

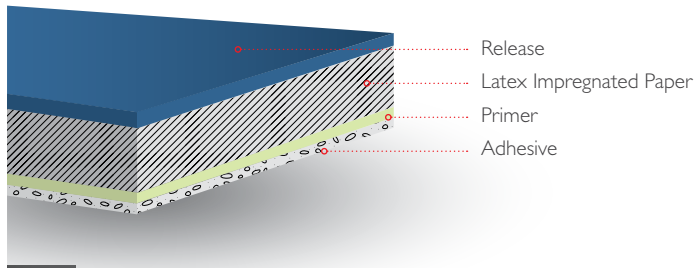

DESCRIPTION:

Highest grade automotive masking tape recommended for wet sanding applications. Suitable for aircraft painting. Saturated semi crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive.

APPLICATIONS:

- Wet sanding water proof.
- Guaranteed spray painting oven use in 120°C for 30 minutes.
- Aircraft painting

PROPERTIES:

- Wet sanding.
- 120°C oven use for 30 minutes.
- Suitable for both metallic and plastic surfaces
- Absolute residue free removal
- Various surface options to cover special requirements.
- Excellent tape to tape adhesion
- Solvent and thinner resistant.
- Easy tear
- Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces



NOMINAL VALUES:

Backing

Impregnated Crepe Paper

Adhesive

Solvent-based, Natural Rubber

Tensile Strength MD

110 ± 30 (N/25mm)

TM 5004 by Afera

Elongation at Break MD

10 ± 3 (%)

TM 5004 by Afera

Peel Adhesion on Stainless Steel

5 ± 1 (N/25mm)

TM 5001 by Afera

Paper thickness

110 ± 15 (µm)

Total thickness

135 ± 25 (µm)

Application Range

120°C for 30 minutes

Paper Colors Yellow ■ orange ■

Adhesive Color Transparent

Effective: January 2019